



Custom Service & Design, Inc.

P.O. Box 214923
Auburn Hills, MI 48321

Phone: 248.340.9005
Fax: 248.340.9002


www.customserviceanddesign.com

BULLETIN: SSEL01-1

CARTRIDGE LENGTH				END CONFIGURATION		
9-3/4	19-1/2	29-1/2		DOE = Double open end, with seals	SOE = Single open end, with seal	222 = Twin O-ring*
9-7/8	20	30		1NPTM = Male NPT, 1-in.*	1NPTF = Female NPT, 1-in.*	
10						
MICRON RATING				ELEMENT MATERIAL		
840	190	75		S = 304 stainless steel	S316 = 316 stainless steel	
540	150	40		SEAL MATERIAL		
370	120	20		B = Buna-N	E = Ethylene Propylene	
280	100	10		V = Viton®	T = Teflon®	
230	80	5				
CONSTRUCTION						
Pleated = P						
Cylindrical = C						

* Opposite end closed

Dimensions (IN)

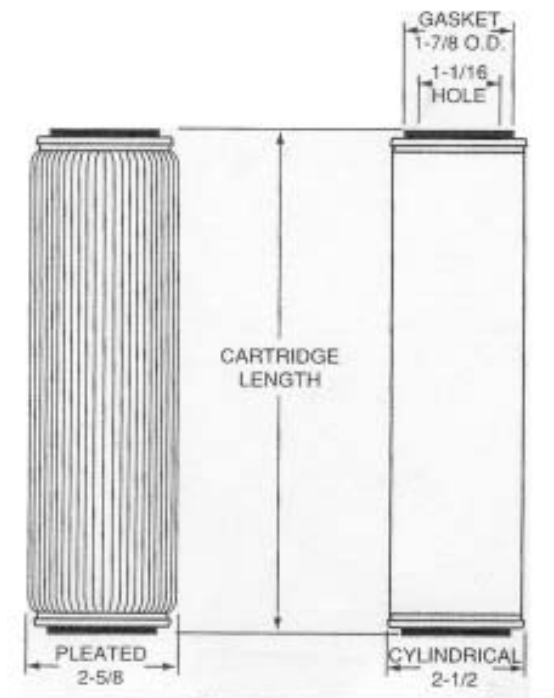

Pleat Protectors

Pleat protectors prevent accidental denting of pleat forms that reduce filter area. Made of stainless steel with 1/4-in. dia. perforations, they are held in place by bending tabs at the top and bottom. When ordering give nominal length (10, 20, or 30 inches) and material (304 or 316 stainless steel).

